

Holden 6L80 Wiring


Connection using Factory Mode

Attention

You cannot use OBD Flash files to write into the ECU

Holden-6L80-Module

You don't need to open 6L80 cover in this factory mode. Please connect wires as described below

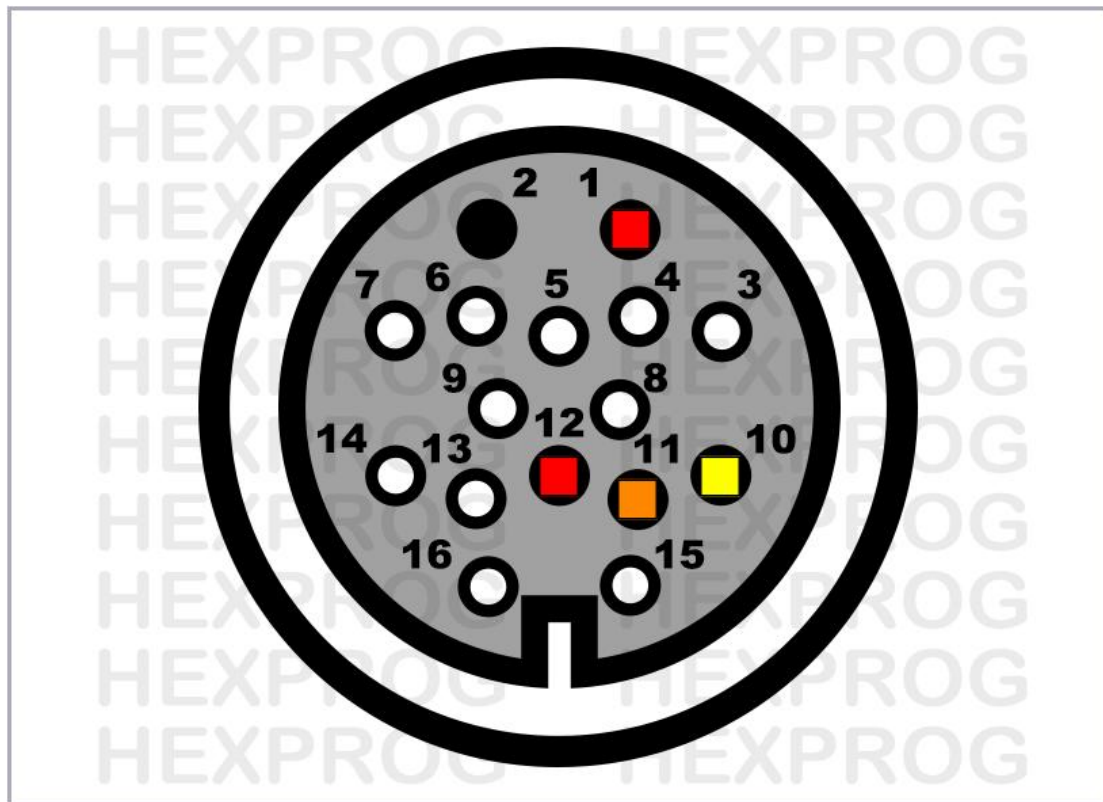

Pins Description

- Block1-**Pin 1**: Power Supply 12-14V
- Block1-**Pin 10**: CANBUS High 2
- Block1-**Pin 11**: CANBUS Low 2
- Block1-**Pin 12**: Power Supply 12-14V
- Block1-**Pin 2**: Ground