# **Holden E78 Wiring**

### **Connection using Boot Mode**


## **Attention**

# You cannot use OBD Flash files to write into the ECU



Holden-E78-Module

You need to open E78 cover in boot mode. Please connect wires as described below

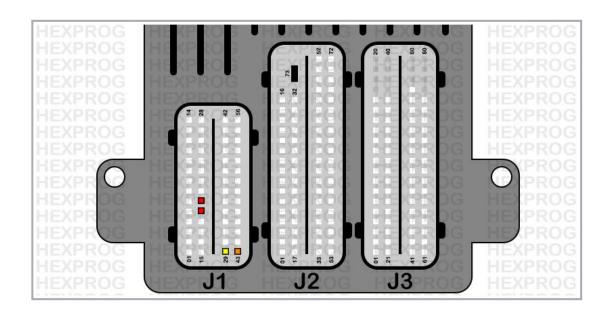

#### **Pins Description**

- Block J1-Pin 19: Power Supply 12-14V
- Block J1-Pin 20: Power Supply 12-14V
- Block J1-Pin 29: CANBUS High 2
- Block J1-Pin 43: CANBUS Low 2
- Block J2-Pin 73: Ground

### Internal Wiring

Connect HexProg signals wires to E78 board as shown below