

## FIAT ME7.9.10 Wiring

### Connection using Boot Mode

## Attention

**You cannot use OBD Flash files to write into the ECU**




FIAT-ME7.9.10-Module

You need to open ME7.9.10 cover in boot mode. Please connect wires as described below

## Available Online Services in ME7.9.10 for Hexprog/Hextag users:

- Lambda Sensor OFF

Check your online services from here to apply to one of these services: [My Online Services](#)

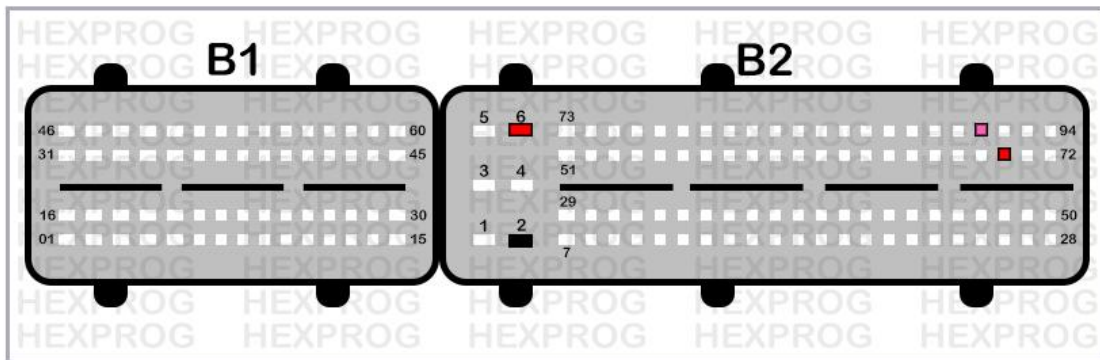

### Pins Description

- Block2-Pin 2: Ground
- Block2-Pin 6: Power Supply 12-14V
- Block2-Pin 70: Power Supply 12-14V
- Block2-Pin 91: K-Line Signal

### Internal Wiring

Connect HexProg signals wires to ME7.9.10 board as shown below



FIAT-ME7.9.10-Inside



FIAT-ME7.9.10-Boot-Location