

Renault EDC16C36 Wiring

Connection using Factory Mode

Attention

You cannot use OBD Flash files to write into the ECU

Please Note: For any error like "**Cannot detect EXT FLASH**" please try from **EDC16CP36 MPC61** option.


You don't need to open EDC16C36 cover in this factory mode. Please connect wires as described below

Available Online Services in EDC16C36 for Hexprog/Hextag users:

- Exhaust Gas Recirculation OFF
- Diesel Particulate Filter OFF

Check your online services from here to apply to one of these services: [My Online Services](#)


Option 1

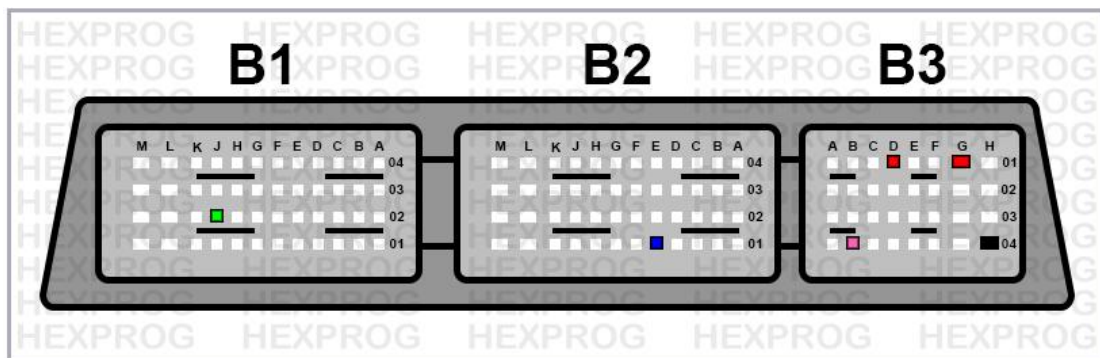

Pins Description for Option 1

- Block1-**Pin J2**: Clock 2 Signal
- Block2-**Pin E1**: Clock 1 Signal
- Block3-**Pin B4**: K-Line Signal
- Block3-**Pin D1**: Power Supply 12-14V
- Block3-**Pin G1**: Power Supply 12-14V
- Block3-**Pin H4**: Ground

Option 2

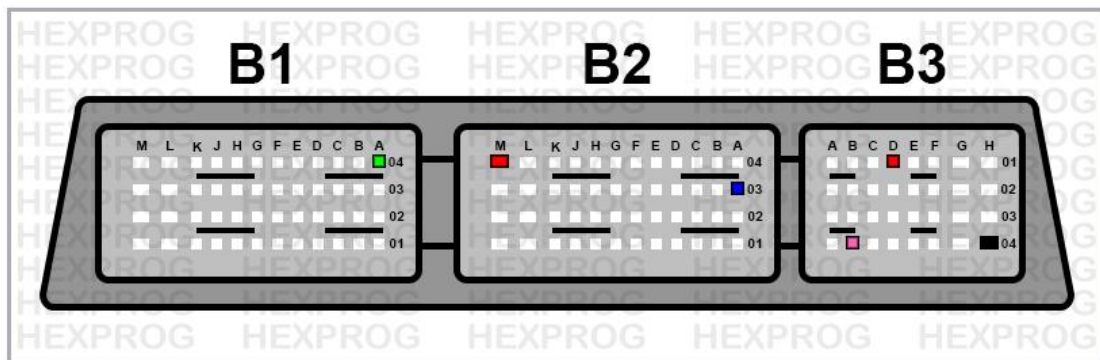

Pins Description for Option 2

- Block1-**Pin: A4** Clock 2 Signal
- Block2-**Pin: A3** Clock 1 Signal
- Block2-**Pin: M4** Power Supply 12-14V
- Block3-**Pin: B4** K-Line Signal
- Block3-**Pin: D1** Power Supply 12-14V
- Block3-**Pin: H4** Ground