## **Renault EDC16CP33 Wiring**

### **Connection using Factory Mode**

## **Attention**

# You cannot use OBD Flash files to write into the ECU

Please Note: For any error like "Cannot detect EXT FLASH" please try from EDC16CP36 MPC61 option.


You don't need to open EDC16CP33 cover in this factory mode. Please connect wires as described below

Available Online Services in EDC16CP33 for Hexprog/Hextag users:

- Exhaust Gas Recirculation OFF
- Diesel Particulate Filter OFF

Check your online services from here to apply to one of these services: My Online Services

#### **Option 1**

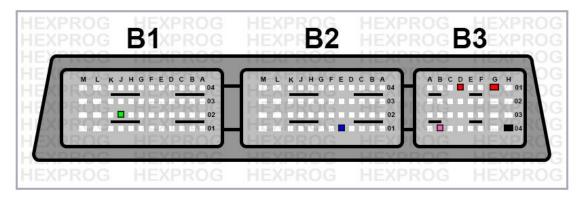

#### **Pins Description for Option 1**

• Block1-Pin J2: Clock 2 Signal

• Block2-Pin E1: Clock 1 Signal


• Block3-Pin B4: K-Line Signal

Block3-Pin D1: Power Supply 12-14V

• Block3-Pin G1: Power Supply 12-14V

• Block3-Pin H4: Ground

#### **Option 2**

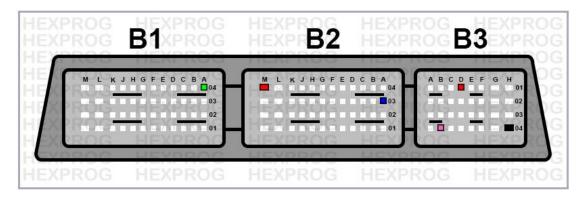

#### **Pins Description for Option 2**

Block1-Pin: A4 Clock 2 Signal

Block2-Pin: A3 Clock 1 Signal

Block2-Pin: M4 Power Supply 12-14V

• Block3-Pin: B4 K-Line Signal

• Block3-Pin: D1 Power Supply 12-14V

• Block3-Pin: H4 Ground